

Product Specification

Seafood TP-255



General:

Seafood is a Timestrip® temperature indicator that shows how long your product has been above a critical refrigerated temperature (3 °C/37 °F).

Inert until activated and self-adhesive, it can be stored at room-temperature then stuck to a product or package when needed (see Appendix 1 for adhesive details). It is single use and indication is irreversible. It is splashproof and there is an expiry date on each pack shipped.

How to use:

The indicators are completely inert prior to activation and can be stored at room temperature.

To activate Seafood the surrounding temperature must be above the threshold temperature of 3 °C so that the blue dyed liquid can be released from the button. Fully squeeze the button and check that the first window turns blue and the word 'On' appears. If not, immediately re-squeeze the button fully. Within 2-3 minutes of activation, place the indicator below its STOP temperature for a minimum of 1 Hour so that the liquid freezes and the indicator is fully conditioned and ready to use. If the carrying card or the product to be monitored is already at or below the STOP temperature then the indicator can be stuck directly to it by removing the adhesive liner on the back.

Threshold Temp	Stop temp*	Run-Out window**	Time Marks in Hours
+3 °C/+37 °F	0 °C/+32 °F	4 Hours	2&4

* The temp at which the run-time advancement (the movement of the blue dye) will stop.

** The run-out window is calibrated to an isothermal temp of +2 °C above the stated/printed Threshold temp.

I) Performance Specifications:

- Temp Accuracy: ± 1 °C/2 °F
- Time Accuracy: ± 15 % in time under isothermal conditions
- Progress Isotherms: See Fig. 1
- Display: Continuous, irreversible
- Usage: The usage of the product in any assembly or production line must be agreed upon in advance, as it may alter performance specifications.

II) Product Specification:

- Button Position: Button on Top (BOT)
- Colour of Progressing Front: Blue
- Adhesive: #2641, Pressure sensitive, -40 °C to +110 °C, Finger lift – See Appendix 1
- Product drawing: See Fig. 2
- Graphics: See Fig. 3
- Other: Not suitable for immersion in water
- Remark: Run-time window length will vary slightly between production batches.

III) Product Construction:

The indicator is constructed of polymeric assembly multi-layer and aluminium-plastic laminate. It encapsulates coloured liquid chemicals*.

* Maximum weight of colorant is <0.5 mg.

** Liquid chemicals are listed in the Food Chemicals Codex and/or approved by the Food and Drug Administration (FDA) under Title 21, and/or considered generally recognized as safe (GRAS).

*** All materials are non-toxic, latex, silicon and PVC free.



the smart way to measure time & temperature

IV) Storage Conditions (un-activated):

- Store in a cool dark environment away from heat sources.
- Recommended: 22 °C/72 °F at 20-80% RH.
- Please note that before activation, the product can tolerate short term exposure
- during transit (hours or a few days) to temperatures in the range -30 °C to +55 °C.
- However, long term storage should be under recommended conditions.

V) Shelf-life:

- 2 Years – an expiry date is stated on each pack.

visit www.timestrip.com

Fig 1: Progress Isotherm

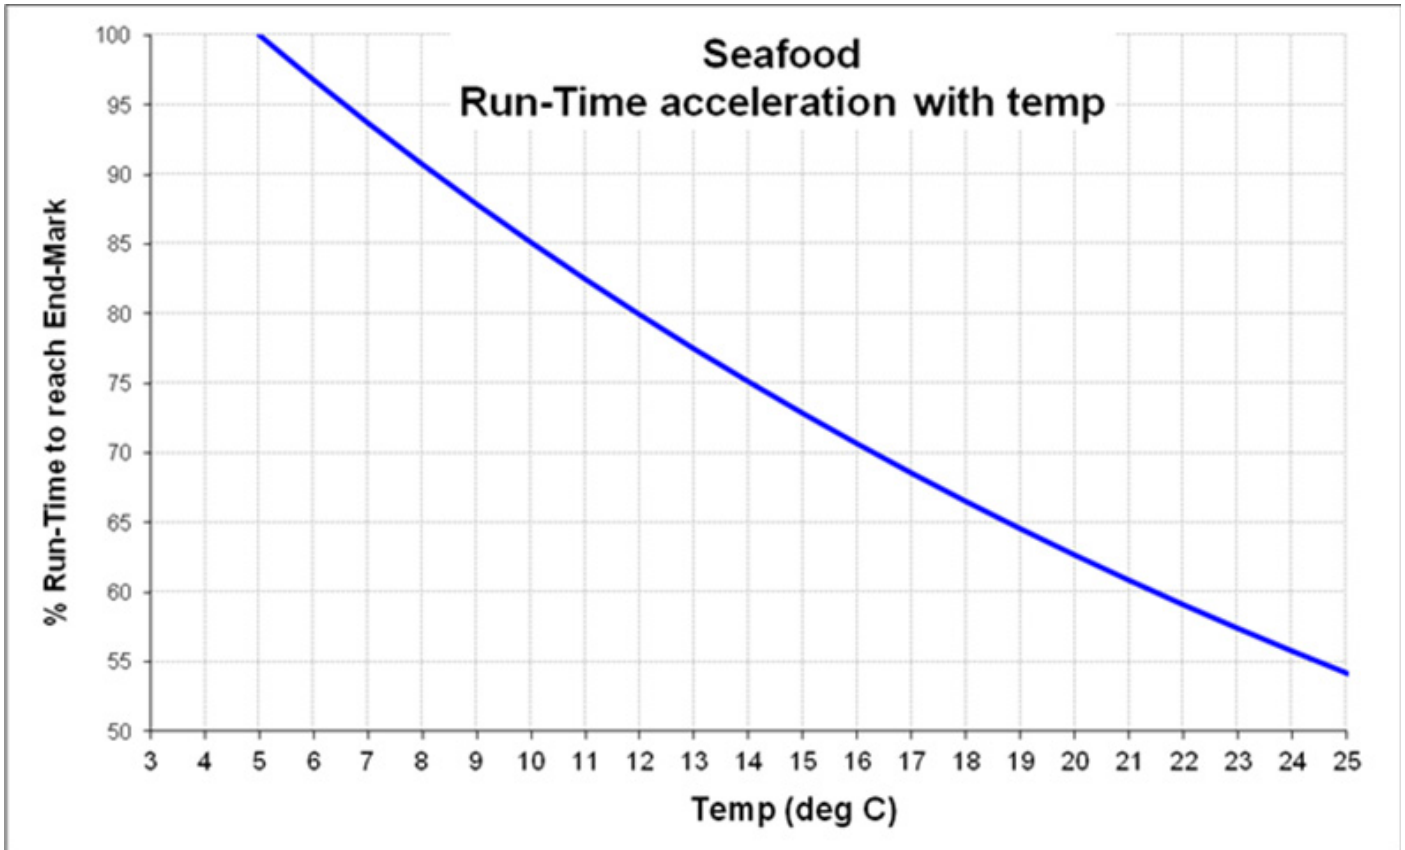


Fig 2: Product Drawing

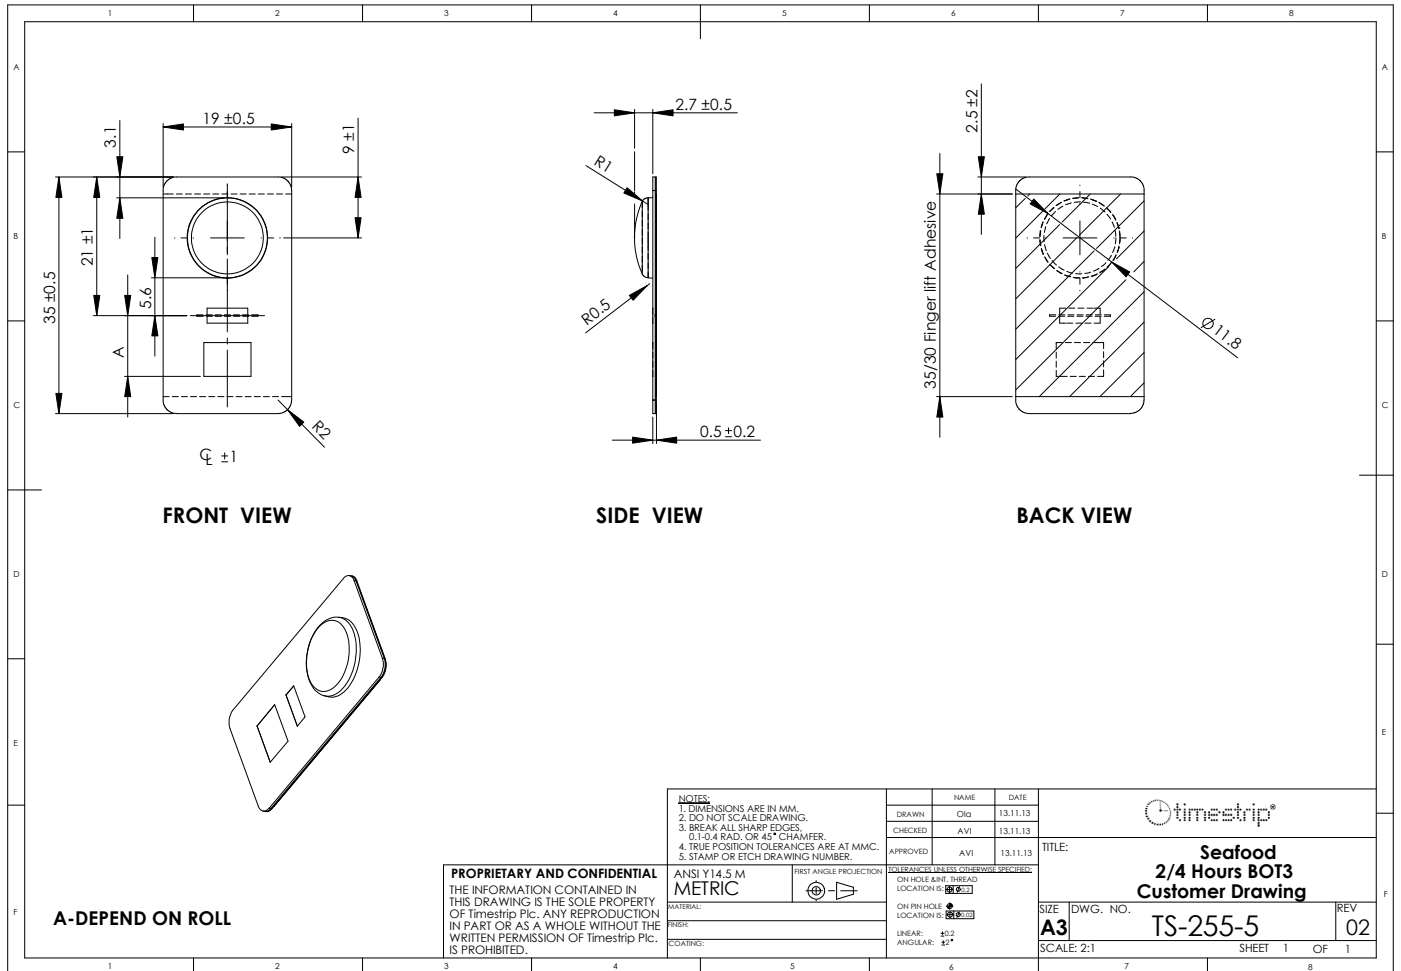




Fig 3: Graphics

Before



After



100%

200%


Pantone 3145 EC

P485 ec

Pantone 536 EC

Pantone Process Blac EC

Gradient Pantone 3145 EC&Pantone 2756 EC




TS Pantone 3145 C


TS Pantone Process 320 C

TS Pantone 2735 C

***For Approval:**

1. Print out, sign and Fax to +972-9-8991347 or
2. Send a Mail with the approved graphics attached to mail.

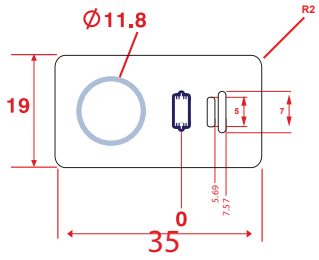

Customer approval *			
Name		Title: Seafood 2/4 Hours BOT	
Sign.		Graphic no. 800-255A	
Date		Rev. 3 SH. 1 OF. 1	
	Graphic Designer: Ola F. 24.10.13		
	Lin. Tolerance: ±0.5mm.		
	Drawing No.:		
	Printing DWG:		

Appendix 1

Pressure Sensitive Adhesive Data				
Timestrip Adhesive - Product # 2641				
	SUBSTANCE		THICKNESS	
Adhesive	40gsm	Adhesive & Carrier	95 micron	
Tissue	12gsm			
Adhesive	45gsm			
Liner	80gsm	Liner	70 micron	
<u>PRODUCT DESCRIPTION</u>				
A permanent tape with a tissue carrier. The adhesive is a modified acrylic, offering good UV light and chemical resistance together with high performance especially to difficult surfaces. The liner is a two side release system.				
<u>APPLICATIONS</u>				
The high tack/adhesion of 2641 makes it especially useful for applications involving the bonding of difficult substrates such as many foams, rubbers and polythene type materials. The product is also useful for various mounting applications.				
<u>ADHESIVE PROPERTIES</u>		<u>20 min</u>	<u>24 hour</u>	<u>TEST METHOD</u>
Adhesion to steel	open side	1300 N/M	1400 N/M	BS7116:1990 - D
	closed side	1300 N/M	1400 N/M	BS7116:1990 - D
Shear Adhesion	open side	5 hours		BS7116:1990 - B
	closed side	5 hours		BS7116:1990 - B
Release of liner from adhesive		10 N/M		BS7116:1990 - E
<u>THERMAL PROPERTIES</u>				
Recommended service temperature range		-40°C to 110°C	-40°F to 230°F	
Application temperature range		5°C to 60°C	41°F to 140°F	
<u>SHELF LIFE</u>				
Minimum shelf life when stored in closed cartons away from direct sources of heat and sunlight.		2 Years		
<u>HEALTH AND SAFETY INFORMATION</u>				
The adhesive conforms to F&DA Regulation 175.105.				
Note				
Values given are average and should not be taken as a maximum or minimum for specification purposes. Specific technical details, applications information and suggested uses available.				
For additional information contact us on:				
1, Haatzmut Street, P.O. box 3005, Even Yehuda, 40500, Israel Tel: +972-9-8992005 Fax: +972-9-8991347				
QA-AD1 12/09				

Document information

Document Type	Identifying No.	Rev./Issue	Date
Graphics	800-255A	03	24.10.13
Product Drawing	TS-255-5	02	13.11.13
Adhesive #2641 Data Sheet	QA-AD1	00	12.2009
Product Specification Sheet	--	02	08.10.15